




PSB SYSTEMS

Conveyor belt cleaners


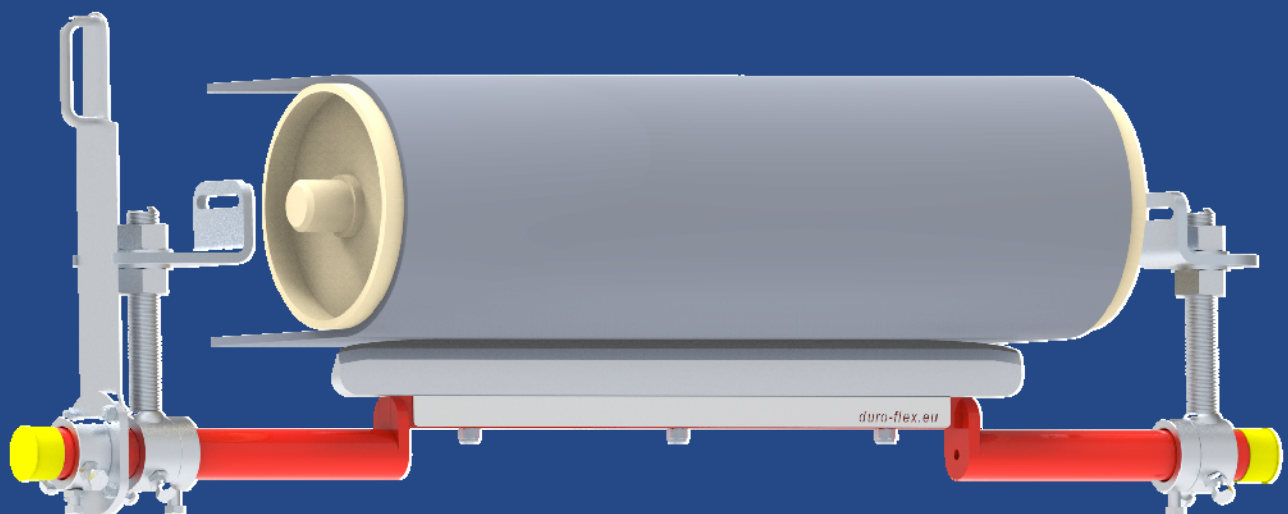


Conveyor belt cleaning system

REA 2.0

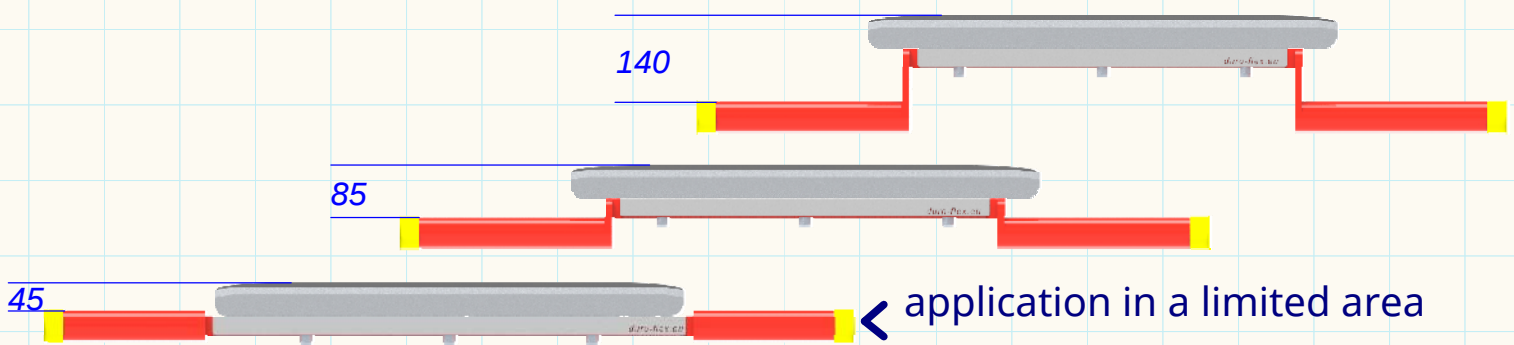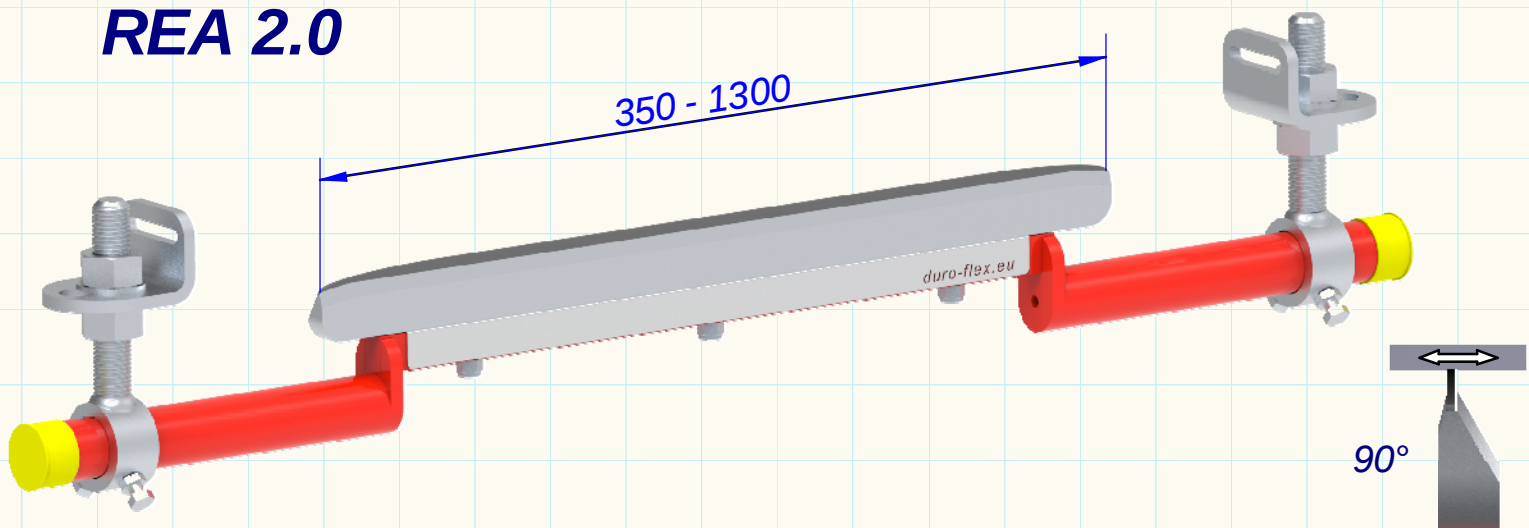





LINEAR

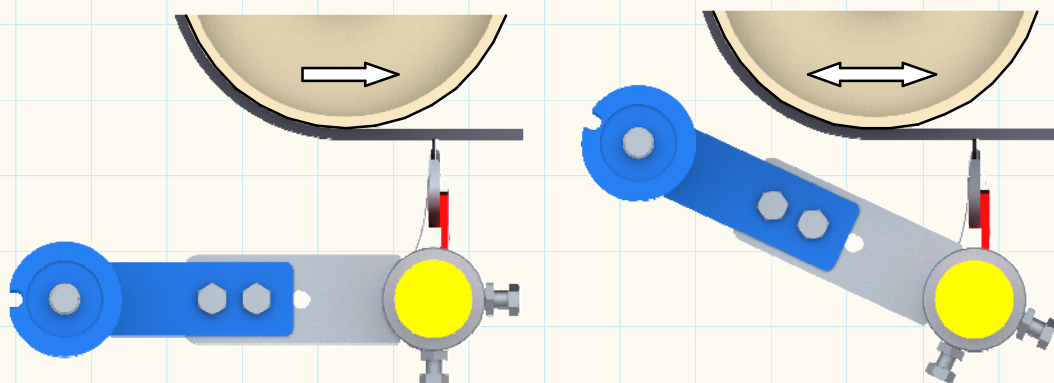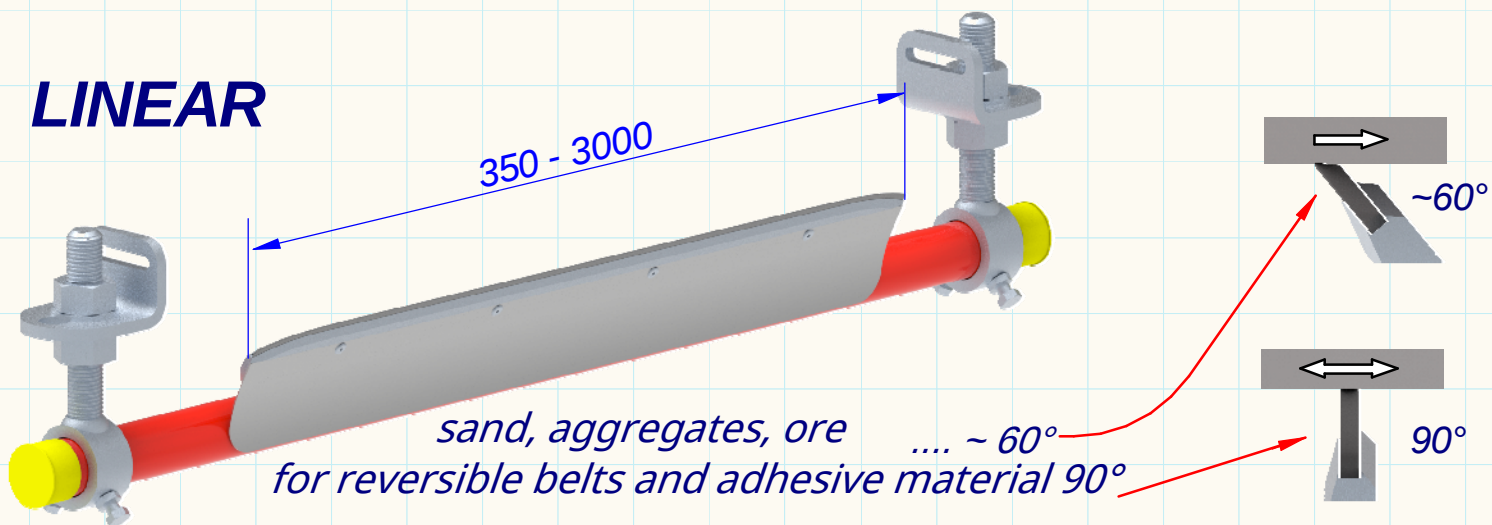


dimensions are in mm

INROX *stainless steel 1.4301*

- 200° C

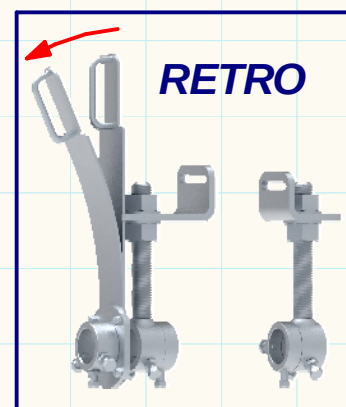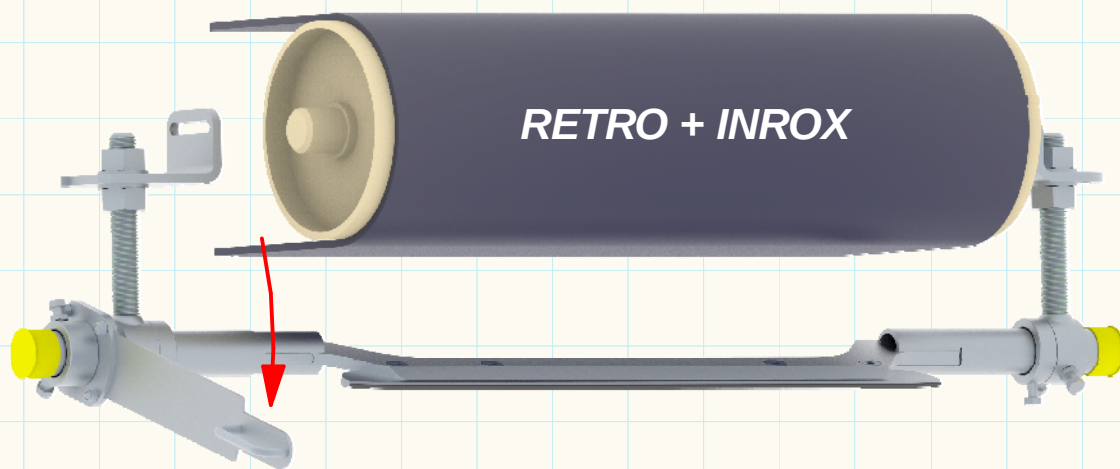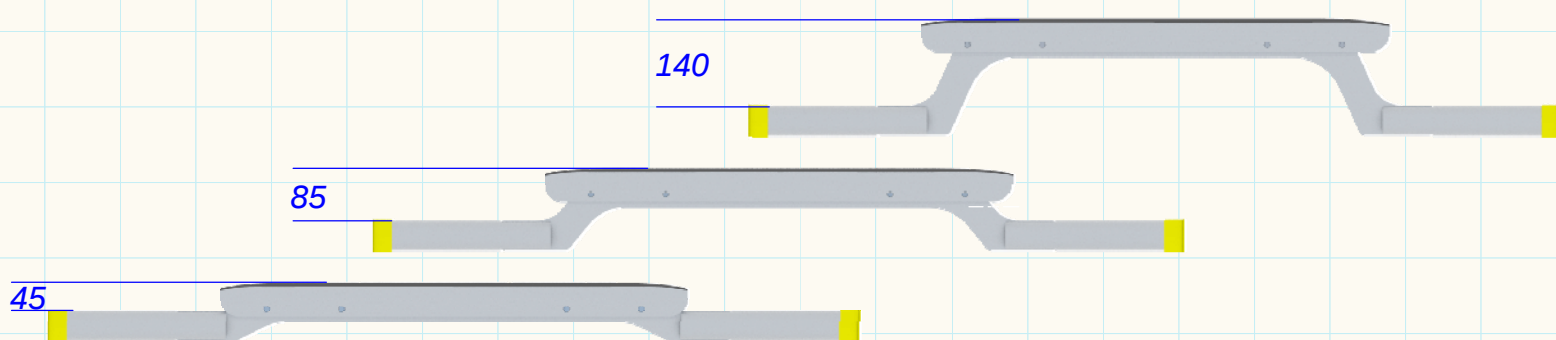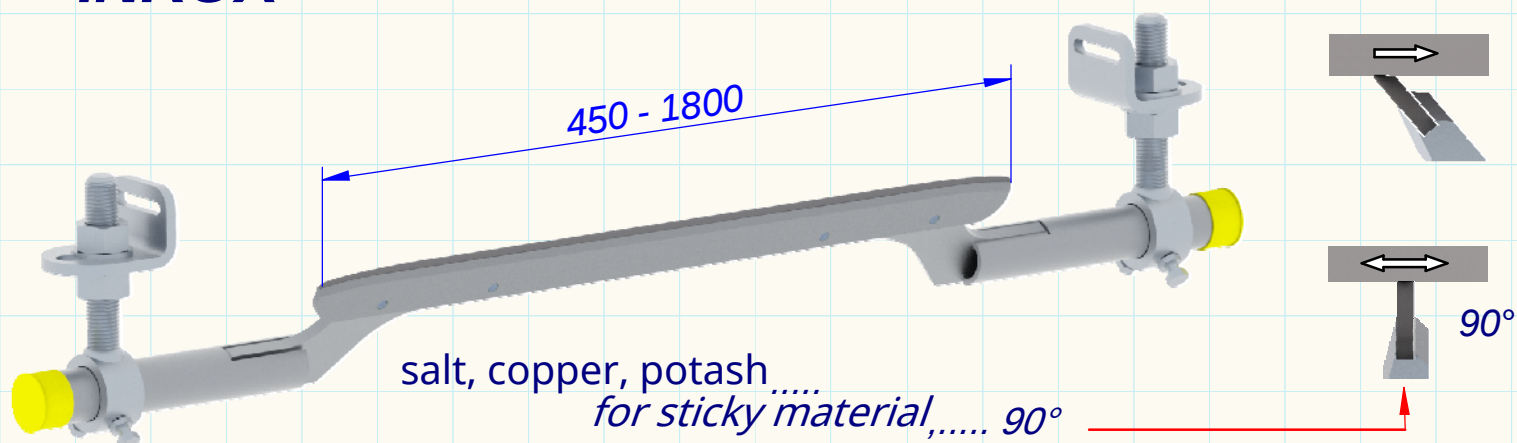

*Double spring tension for non-reversible tape.
(not for reversing belt)*



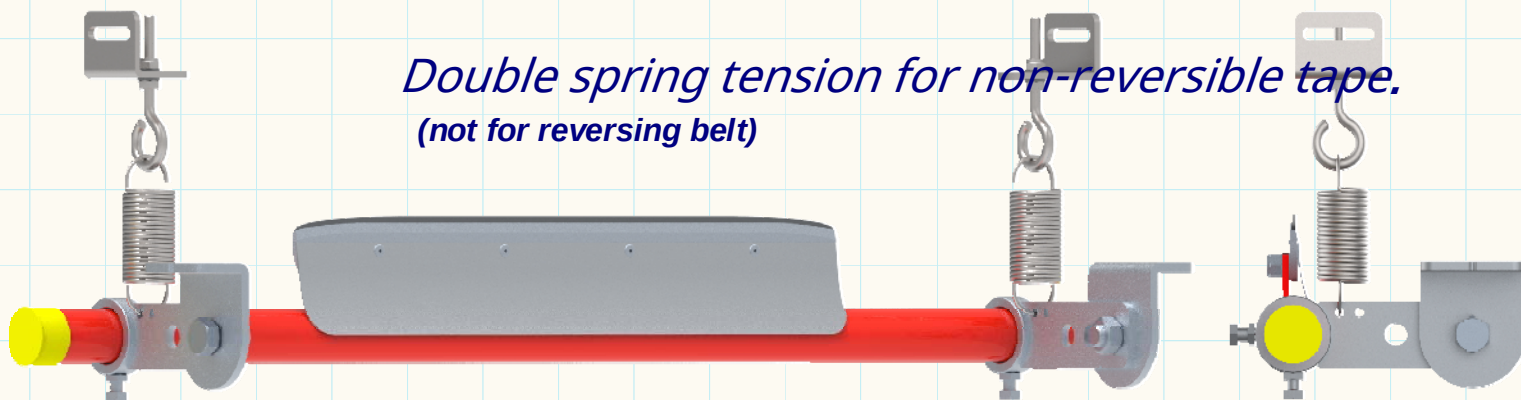


PU - Brush

stainless steel

The motor is built-in


300 - 1200mm

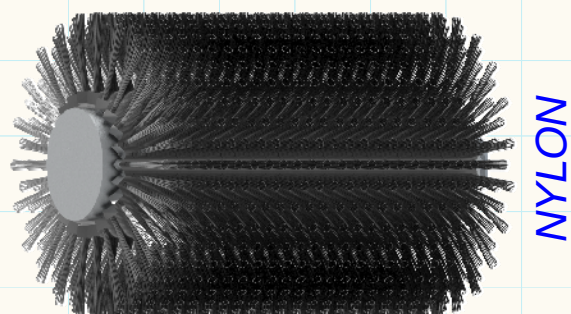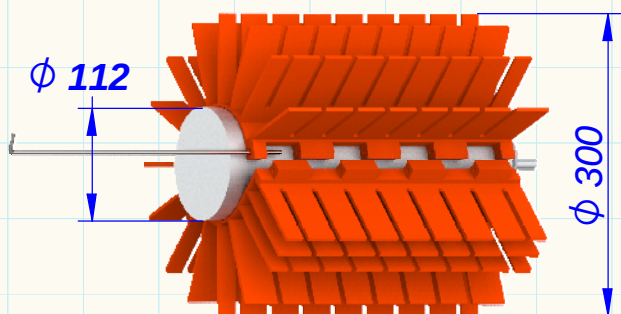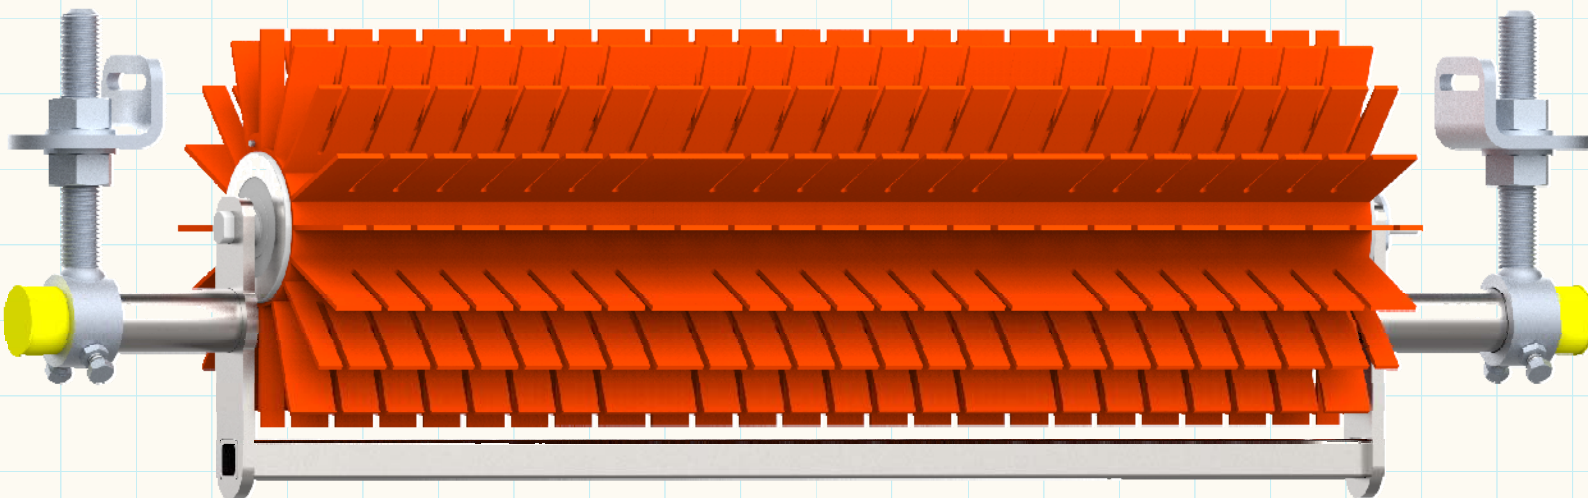

CHEVRON

390 - 3000

POLYURETHAN

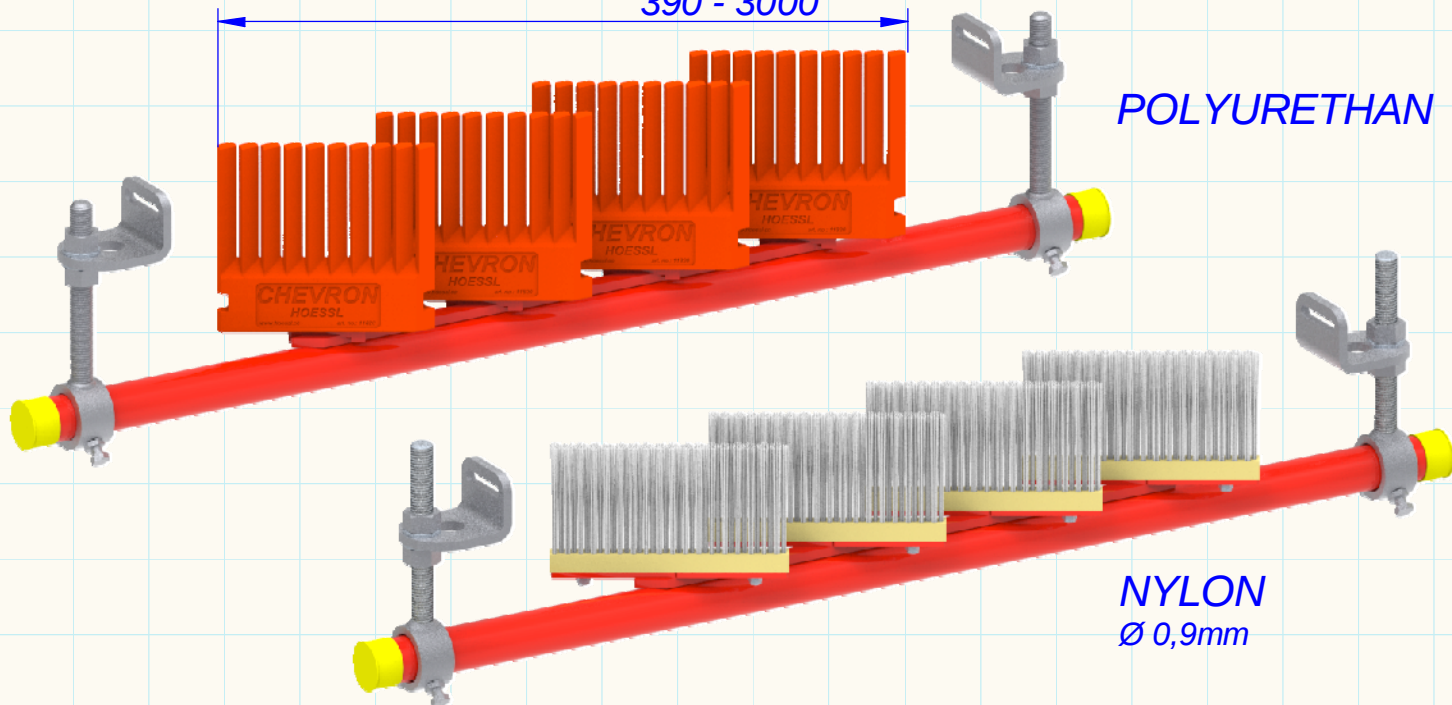


NYLON
 $\phi 0,9mm$

PU - 90 primary cleaner




Drum diameters



PU-90 S
220-320




PU-90
320-520




PU-90 HD
420-620



PU-90 L
520-1000

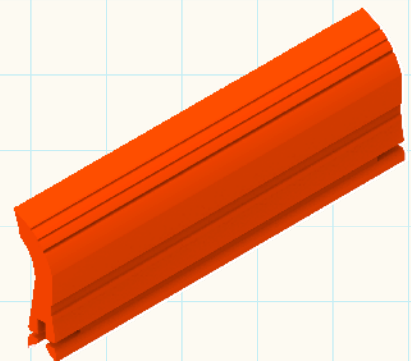


P-1
320-520

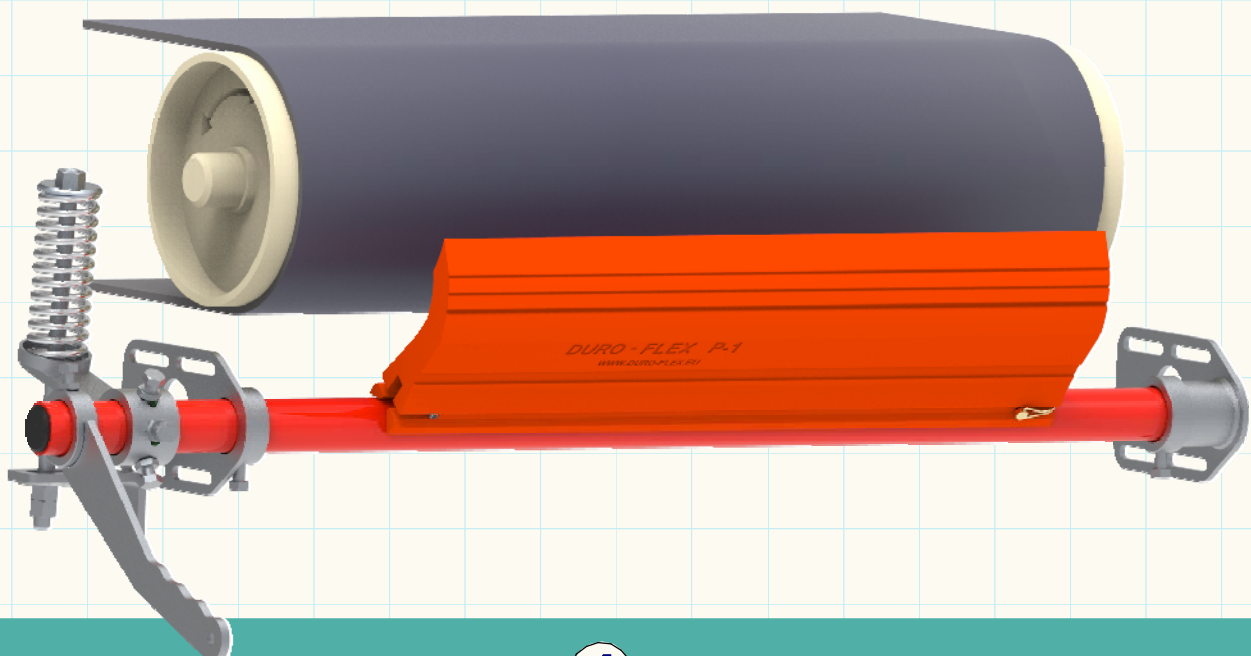

P-2


-30°C/ +70°C

(alternativ - 150°C)

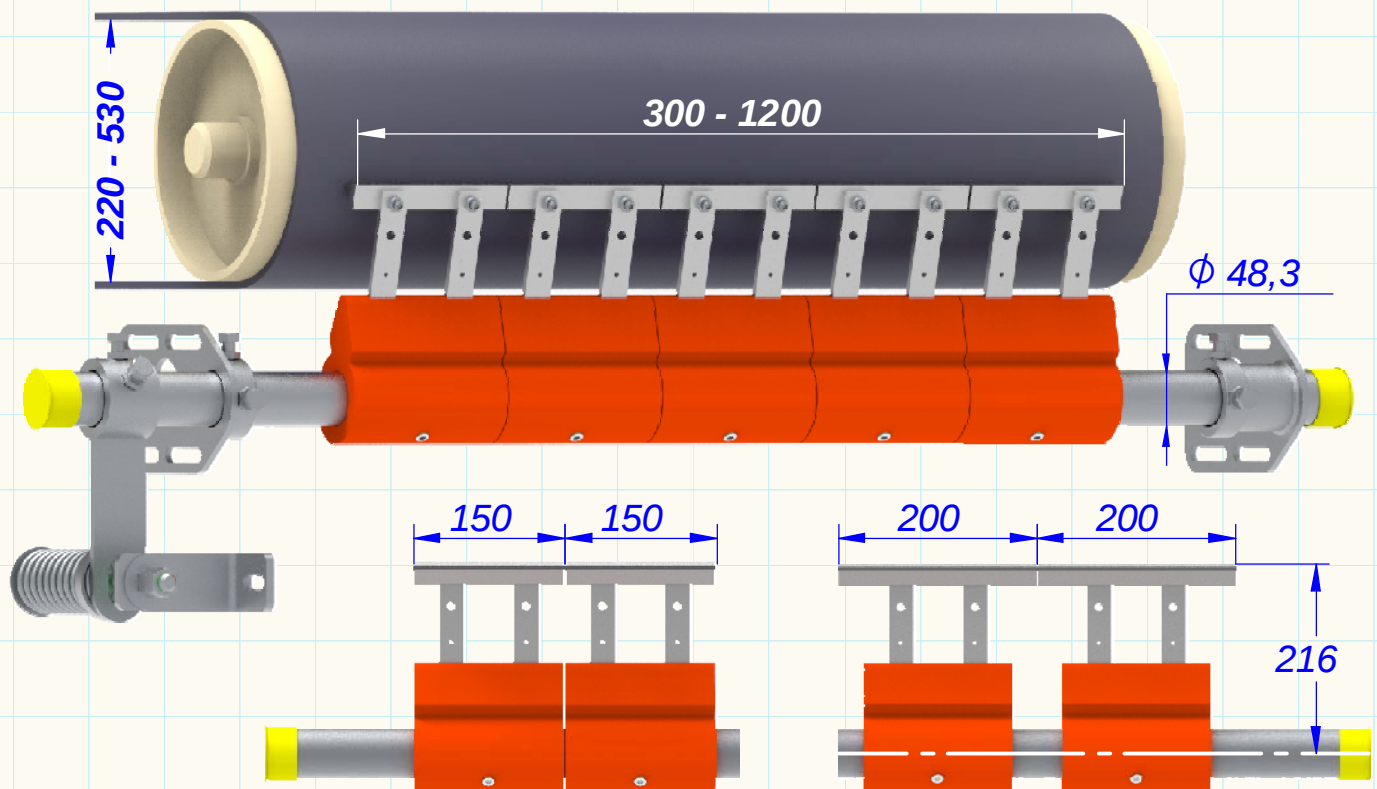

gravel, clay, brick production, power plants, ore


P-3

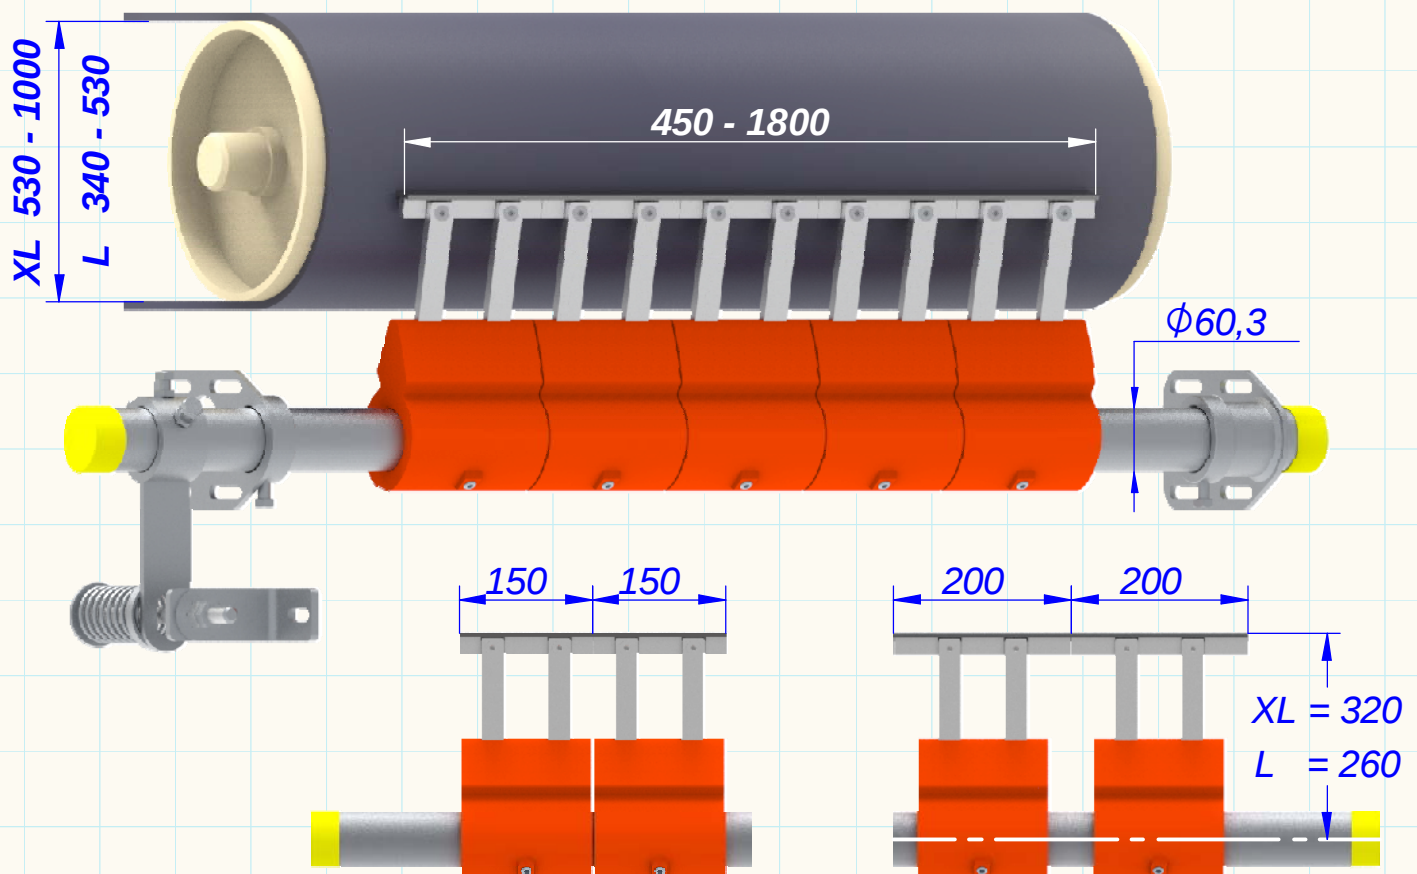

P-2 INROX®

stainless steel spring + tungsten carbide tips

- 200°C

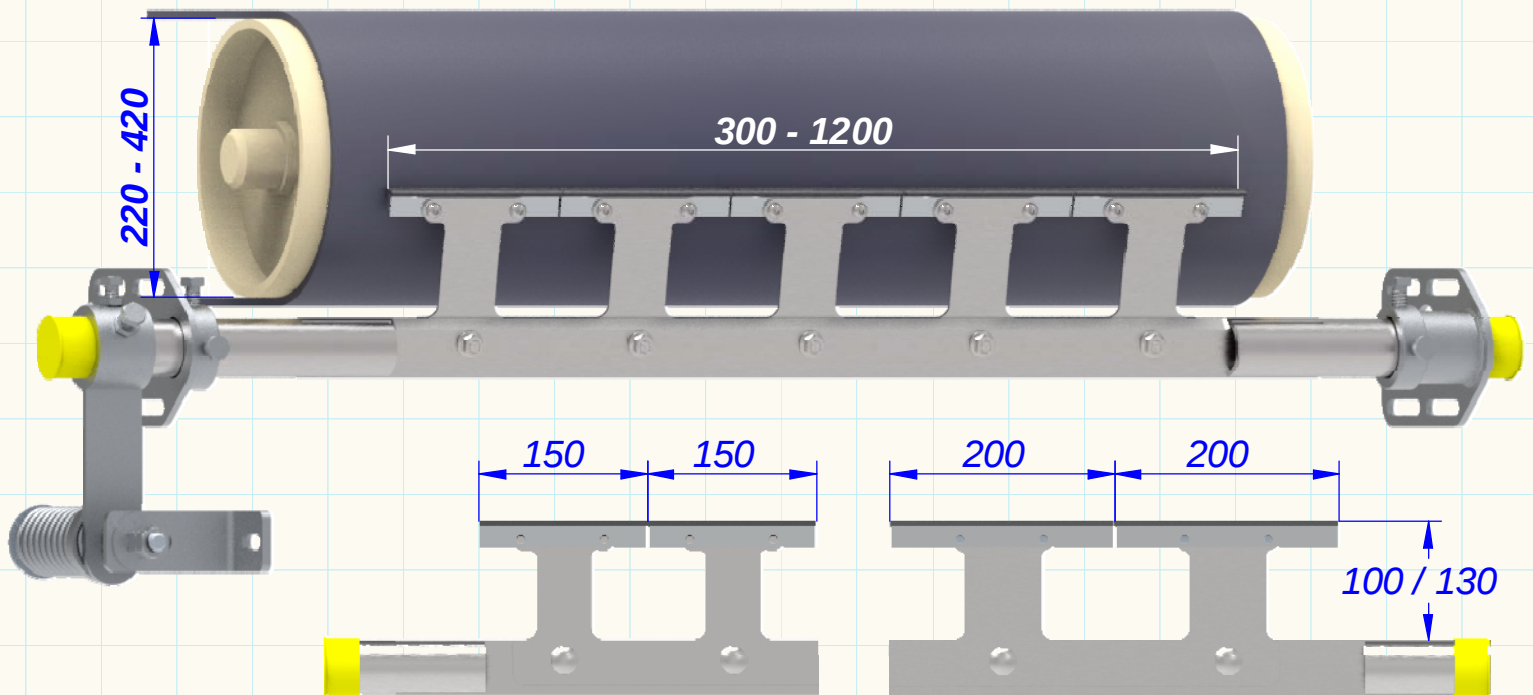


asphalt, cement, clinker

stainless steel **P-10**

P-10 FDA - For the food industry




-30°C/ +70°C

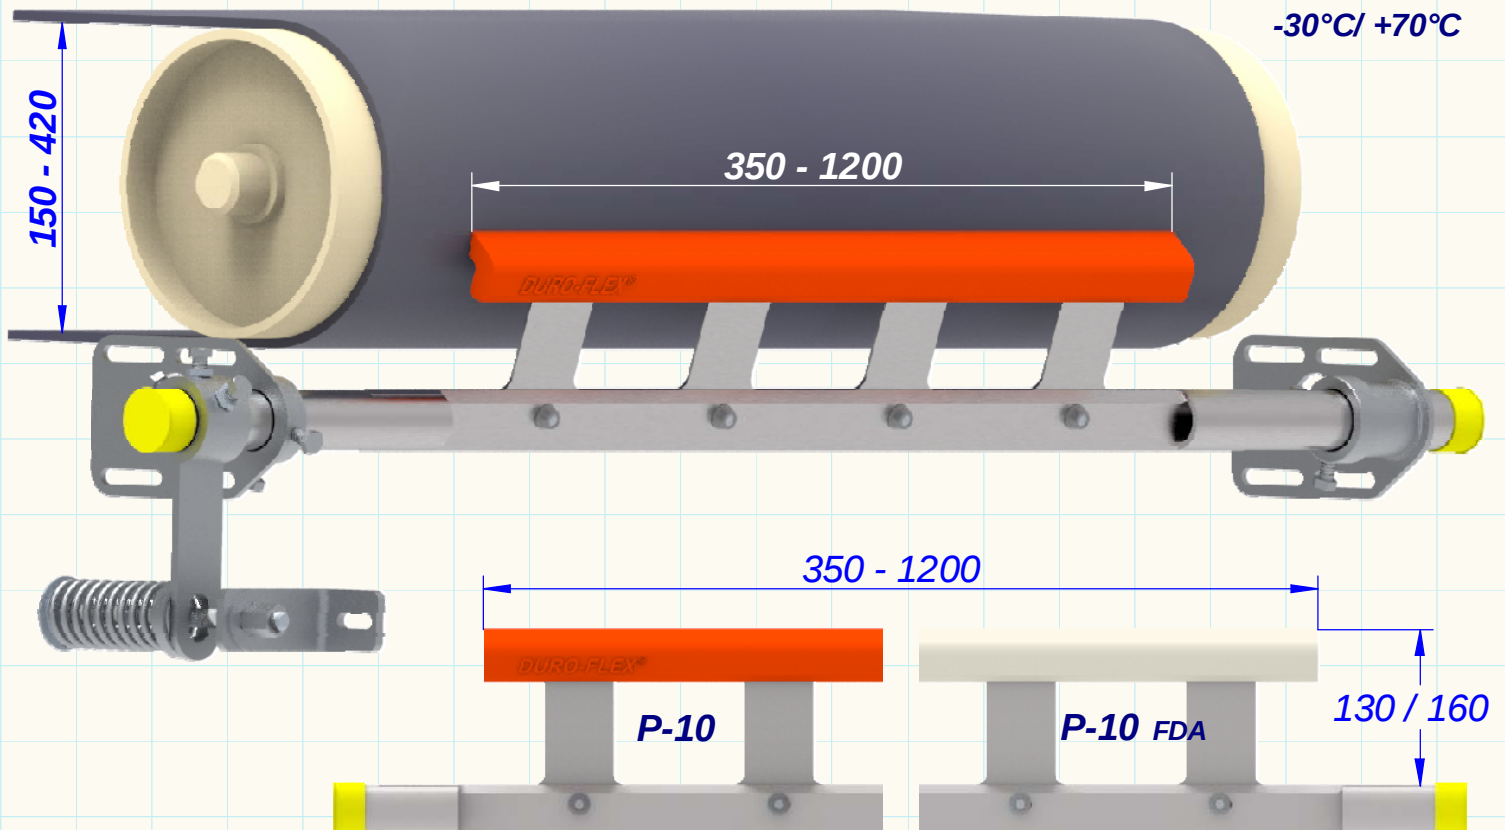

urea, woodworking, recycling...

fermentation by-products

PULLEY

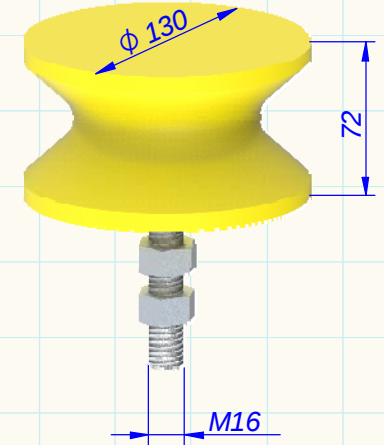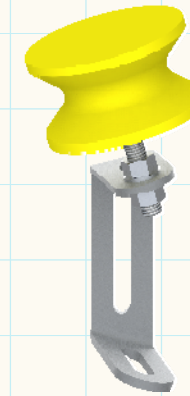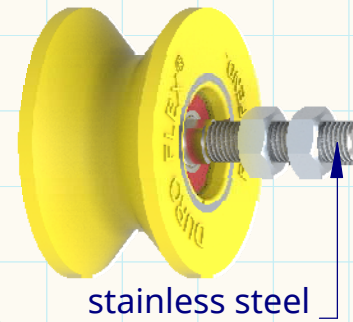

PLOUGH P-2

400 - 1400 mm

DIAGONAL

Stainless steel frames

